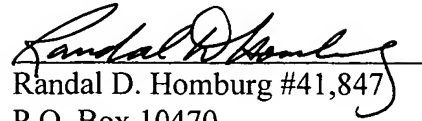


## **ABSTRACT OF INVENTION**

A seat cover for an automobile to be installed over existing automobile seats includes at least two fabric straps having a hook surface, each of the fabric straps being attached to the automobile seat by a lower hook engaging the lower seat frame, an upper hook engaging the headrest supports, and an intermediate retaining bracket which engages each strap and retains it in the fold of the automobile seat located between the seat portion and the back portion of the automobile seat, the straps held against the inner surface of the seat with the hook surface facing outward from the automobile seat, with a lower seat cover covering the seat portion, the lower seat cover having an inner surface having a fabric loop surface which engages the hook surface of each strap, and an upper seat cover covering the back portion, the upper seat cover also having an inner surface having a fabric loop surface which engages the hook surface of each strap, the upper seat cover also having a headrest cover which covers the headrest of the automobile seat, the headrest cover removably attaching to the upper seat cover by a headrest retaining tab made of a fabric hook material.

Respectfully submitted;

A handwritten signature in black ink, appearing to read "Randal D. Homburg", is written over a horizontal line.

Randal D. Homburg #41,847  
P.O. Box 10470  
Midwest City, OK 73140-1470